

CASCADE17-0146Y1

R134a

12/24 V DC

VARIABLE SPEED



Brushless DC Variable Speed Compressor Technical Data Sheet

General Information

Part Number - Mobile (Single Pack)	CASCADE0001BAAMU	
Part Number - Mobile (Pallet Pack)	CASCADE0001BAAHB	(140 per pallet)
Part Number - Stationary (Single Pack)	CASCADE0008BAAMU	
Part Number - Stationary (Pallet Pack)	CASCADE0008BAAHB	(140 per pallet)
Part Number - Units (Single Pack)	CASCADE0010BAAMU	
Part Number - Units (Pallet Pack)	CASCADE0010BAAHB	(140 per pallet)
Controller Part Number	030F0121	
Controller Part Number	030F0182	
Compressor Drawing	DCMX14-001	
Wiring Diagram Drawing	DEM0024	

Application Information

Application	LBP
Refrigerant	R134a
Evaporator Temperature Range	-34.4° C to -12.2° C (-30° F to +10° F)
Condenser Temperature Range	37.8° C to 60° C (100° F to 140° F)




Design

Displacement	2.39 cm ³ (0.146 in ³)
Oil Quantity	263 ml
Oil Type	POE 10cSt
Weight - Compressor/Controller	6.40 kg / 14.1 lb

	12V			24V		
Battery Protection	Min.	Nominal	Max.	Min.	Nominal	Max.
Over Voltage Shutdown	16.1	17.0	17.9	29.9	31.5	33.0
Under Voltage Shutdown	9.9	10.4	10.9	22.3	22.8	23.3

Compressor Dimensions - CASCADE0001 & CASCADE0008

CLUSTER BLOCK ORIENTATION

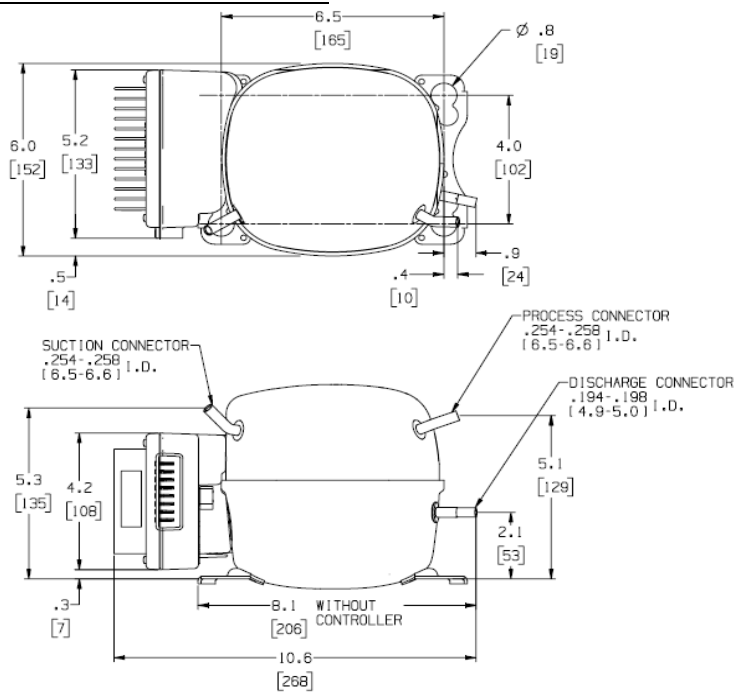


the Cascade

CASCADE17-0146Y1





Compressor Dimensions - CASCADE0010

CLUSTER BLOCK ORIENTATION




WHITE
BLACK/WHITE
RED/WHITE

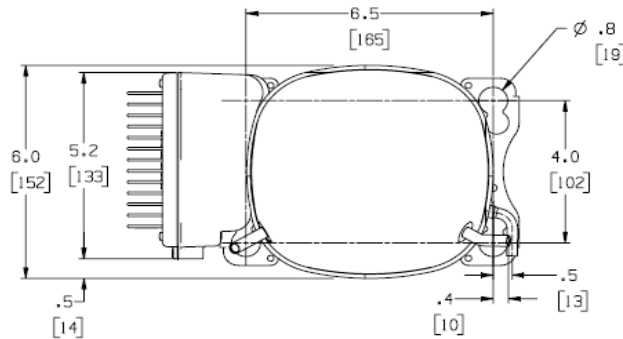

SUCTION CONNECTOR
.254-.258 I.D.
[6.5-6.6]

PROCESS CONNECTOR
.254-.258 I.D.
[6.5-6.6]

DISCHARGE CONNECTOR
.194-.198 I.D.
[4.9-5.0]

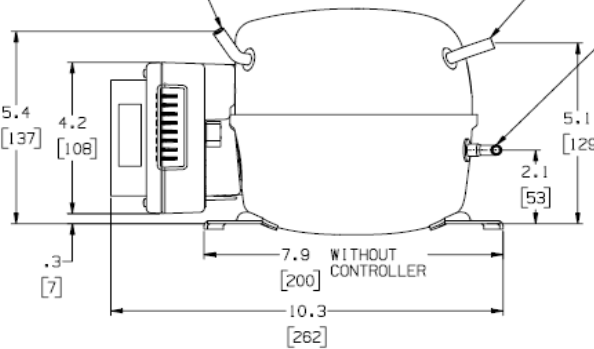

Performance Characteristics

CECOMAF LBP							12V	Test Temperatures	CECOMAF	SPEER
RPM	Cooling Capacity		Power	Current	Efficiency		Condensing	Evaporator	Ambient	Suction Gas
	BTU/hr	Watt	Watt	Amp	EER	COP				
1800	95.37	27.95	29.28	2.44	3.26	0.95	55°C(131°F)	-25°C(-15°F)	32.2°C(90°F)	40.6°C(105°F)
3000	145.37	42.60	43.32	3.61	3.36	0.98	32.2°C(90°F)	32.2°C(90°F)	32.2°C(90°F)	32.2°C(90°F)
4200	184.66	54.12	58.92	4.91	3.13	0.92	Liquid	55°C(131°F)	32.2°C(90°F)	32.2°C(90°F)

CECOMAF LBP							24V
RPM	Cooling Capacity		Power	Current	Efficiency		
	BTU/hr	Watt	Watt	Amp	EER	COP	
1800	95.37	27.95	29.28	1.22	3.26	0.95	
3000	145.37	42.60	43.32	1.81	3.36	0.98	
4200	184.66	54.12	58.92	2.46	3.13	0.92	

SPEER							12V
rpm	Cooling Capacity		Power	Current	Efficiency		
	BTU/hr	Watt	Watt	Amp	EER	COP	
1800	128.05	37.53	26.40	2.20	4.85	1.42	
3000	210.21	61.61	43.20	3.60	4.87	1.43	
4200	265.92	77.93	60.00	5.00	4.43	1.30	

SPEER							24V
rpm	Cooling Capacity		Power	Current	Efficiency		
	BTU/hr	Watt	Watt	Amp	EER	COP	
1800	128.07	37.53	26.40	1.10	4.85	1.42	
3000	210.16	61.59	43.20	1.80	4.86	1.43	
4200	265.94	77.94	60.00	2.50	4.43	1.30	

12/24 VDC Controller Features

- 4 pole sensor-less variable speed BLDC motor controller
- 180W maximum output power
- 10 - 31 VDC input range
- 48V motor supply (voltage boost)
- 12V or 24V operation (auto detect on power up)
- 1800 – 4200 rpm speed
- 0.5 - 4.75V analog speed set input (resistor programmable for fixed speed)
- 0°C to 45°C operating temperature
- Under/Over voltage shutdown (resistor programmable under voltage thresholds)
- Locked rotor detection
- Thermal shutdown – for power devices
- Over current shutdown – for power devices
- Low speed shutdown
- TTL Fault output
- Pulsed Fault output (030F0182 only)
- LED fault indicator
- Fan output, +12VDC @ 0.5A with voltage detection
- Reverse polarity protection

Optional Fixed Resistor Speed Chart


Resistor Value OHMS	Motor Speed [RPM]
200	1800
242	1900
287	2000
388	2200
510	2400
659	2600
847	2800
1090	3000
1.4k	3200
1.88k	3400
2.58k	3600
3.8k	3800
6.36k	4000
15.3k	4200

Use the formula below to find the resistor value needed to achieve a specific speed for the controller.

$$\frac{934960 - 806 \cdot \text{Speed_Desired}}{\text{Speed_Desired} - 4360}$$

LED Fault Indicator Output

Motor Fault	1 Flash
Under Voltage	2 Flashes
Over Voltage	3 Flashes
Over Temperature	4 Flashes
Over Current/Power	5 Flashes
Fan Voltage Error	6 Flashes
General Hardware Error	7 Flashes
System Integrity Fault	8 Flashes

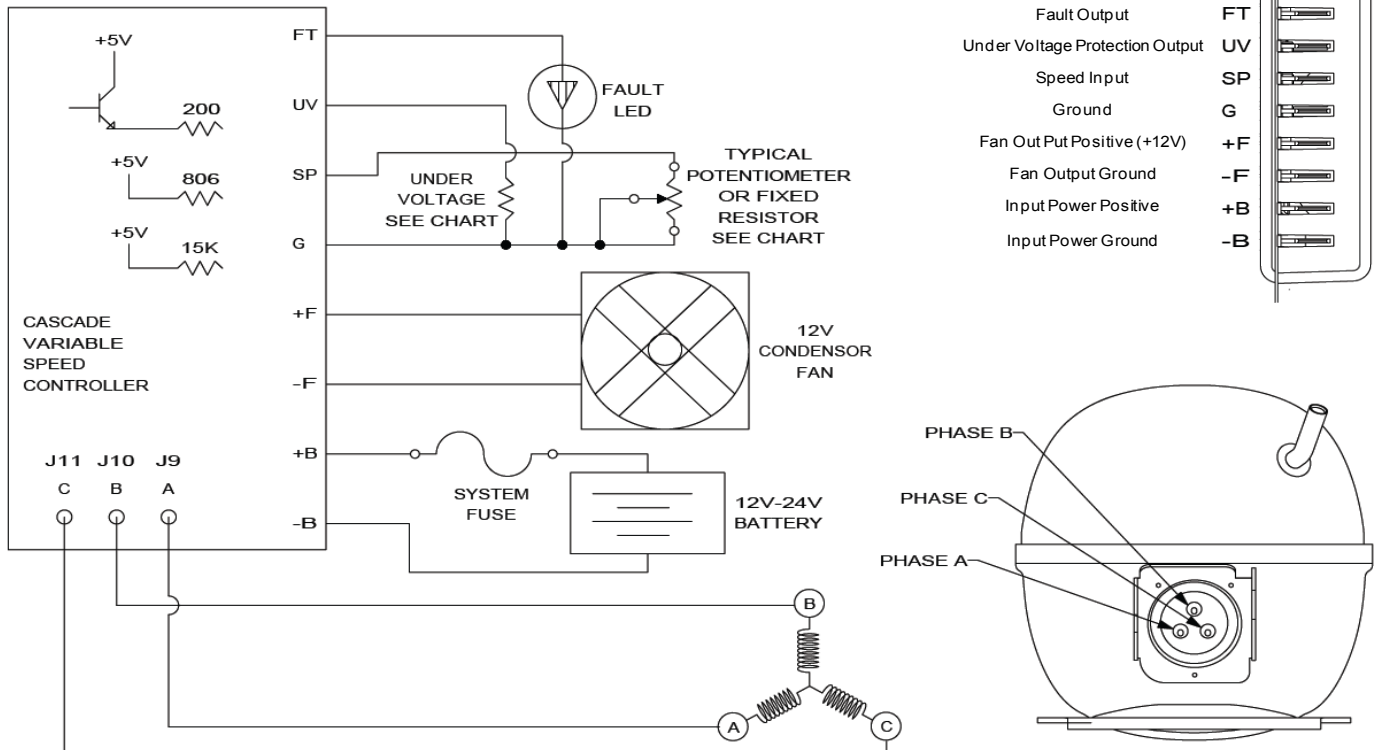

CASCADE17-0146Y1



Cooling Capacity (12V) - ASHRAE LBP BTU/hr (Watt)

RPM	Evaporator Temperature													
	-30°F (-34°C)	-20°F (-29°C)	-10°F (-23°C)	-5°F (-21°C)	0°F (-18°C)	5°F (-15°C)	10°F (-12°C)	15°F (-9°C)	20°F (-6°C)	25°F (-3°C)	30°F (0°C)	35°F (3°C)	40°F (6°C)	45°F (9°C)
1800	21	83	139	162	185	210	235	269	308	345	382	419	457	494
2400	42	111	176	205	235	269	308	345	382	419	457	494	531	568
3000	64	135	207	241	277	318	365	414	463	512	561	610	659	708
3600	87	157	234	272	314	360	414	463	512	561	610	659	708	757
4200	110	180	259	300	345	397	457	512	561	610	659	708	757	806

Power Consumption (12V) - ASHRAE LBP Watt Current (12V) - ASHRAE LBP Amp

RPM	Evaporator Temperature							Evaporator Temperature						
	-30°F	-20°F	-10°F	-5°F	0°F	5°F	10°F	-30°F	-20°F	-10°F	-5°F	0°F	5°F	10°F
1800	22.7	29.6	32.0	33.8	35.2	36.3	37.4	1.89	2.46	2.67	2.82	2.94	3.02	3.10
2400	17.4	27.5	35.3	38.5	41.5	44.2	46.9	1.45	2.29	2.94	3.21	3.46	3.69	3.91
3000	25.5	35.3	43.8	47.8	51.8	55.8	60.0	2.13	2.94	3.65	3.98	4.31	4.65	5.00
3600	34.2	43.5	52.6	57.3	62.3	67.5	73.2	2.85	3.63	4.39	4.78	5.19	5.63	6.10
4200	40.9	49.7	59.3	64.6	70.4	76.8	84.0	3.41	4.14	4.94	5.38	5.87	6.40	7.00

Efficiency (12V) - ASHRAE LBP BTU/hr/W (W/W)

RPM	Evaporator Temperature													
	-30°F (-34°C)	-20°F (-29°C)	-10°F (-23°C)	-5°F (-21°C)	0°F (-18°C)	5°F (-15°C)	10°F (-12°C)	15°F (-9°C)	20°F (-6°C)	25°F (-3°C)	30°F (0°C)	35°F (3°C)	40°F (6°C)	45°F (9°C)
1800	3.67	3.67	4.70	5.06	5.47	5.97	6.63	7.39	8.15	8.91	9.67	10.43	11.19	11.95
2400	1.23	4.04	4.99	5.33	5.67	6.08	6.57	7.06	7.55	8.04	8.53	9.02	9.51	10.00
3000	1.66	3.83	4.73	5.05	5.36	5.70	6.08	6.46	6.84	7.22	7.60	7.98	8.36	8.74
3600	1.86	3.62	4.45	4.75	5.04	5.33	5.66	5.99	6.32	6.65	6.98	7.31	7.64	7.97
4200	2.13	3.61	4.38	4.65	4.90	5.16	5.44	5.72	6.00	6.28	6.56	6.84	7.12	7.40

* all points are at 32.2°C (90°F) ambient, 32.2°C (90°F) suction temperature, 22.2°C (40°F) subcooling, 54.4°C (130°F) condenser

Performance Coefficients (12V) - ASHRAE LBP

Coefficient	Capacity (BTU/Hr)	Power (Watts)	Current (Amperes)	Mass Flow (Lbs/Hr)
C1	-2.358132E+03	-6.476596E+02	-5.397163E+01	-2.513047E+01
C2	1.520949E+00	-2.896618E-02	-2.413849E-03	1.566362E-02
C3	-3.003280E-05	1.654752E-05	1.378960E-06	-2.905075E-07
C4	1.502638E-09	-1.921756E-09	-1.601463E-10	1.729447E-11
C5	-9.092651E+01	7.587934E+00	6.323278E-01	-8.399066E-01
C6	4.220367E-02	1.292411E-01	1.077010E-02	1.695604E-03
C7	3.181015E-03	1.314242E-04	1.095202E-05	3.755620E-05
C8	3.284589E+01	1.799743E+01	1.499785E+00	3.395230E-01
C9	-8.038277E-02	-1.572455E-01	-1.310380E-02	-6.967798E-04
C10	-2.672858E-04	4.630518E-04	3.858765E-05	-3.479881E-06
C11	-8.886435E-04	2.143779E-05	1.786482E-06	-8.894770E-06
C12	2.830319E-09	-4.473376E-10	-3.727814E-11	3.437094E-11
C13	-2.341001E-06	2.007991E-07	1.673326E-08	-2.243456E-08
C14	3.052792E-06	-8.129419E-08	-6.774515E-09	3.038437E-08
C15	6.768640E-02	-9.306251E-04	-7.755209E-05	6.927089E-04
C16	-2.036331E-02	5.303071E-05	4.419226E-06	-2.109753E-04
C17	1.194597E+00	-1.261315E-01	-1.051096E-02	1.027170E-02
C18	-6.622377E-07	4.005049E-08	3.337541E-09	-8.411343E-09
C19	3.373231E-04	-1.736619E-05	-1.447183E-06	3.351148E-06
C20	6.132017E-08	7.686468E-09	6.405390E-10	2.134388E-10
C21	7.590068E-05	-7.873929E-07	-6.561608E-08	8.102220E-07
C22	-4.169238E-04	-1.185347E-03	-9.877894E-05	-1.433626E-05
C23	-3.870153E-03	4.924808E-04	4.104006E-05	-3.032197E-05

Performance Equation

$$Y = C_1 + C_2 X_1 + C_3 X_1^2 + C_4 X_1^3 + C_5 X_2 + C_6 X_2^2 + C_7 X_2^3 + C_8 X_3 + C_9 X_3^2 + C_{10} X_3^3 + C_{11} X_1 X_2 X_3 + C_{12} X_1^2 X_2 X_3 + C_{13} X_1 X_2^2 X_3 + C_{14} X_1 X_2 X_3^2 + C_{15} X_1^2 X_2 X_3 + C_{16} X_1 X_2^2 X_3 + C_{17} X_1 X_2 X_3^2 + C_{18} X_1^2 X_2 X_3 + C_{19} X_1 X_2^2 X_3 + C_{20} X_1 X_2 X_3^2 + C_{21} X_1 X_2 X_3^2 + C_{22} X_2^2 X_3 + C_{23} X_2 X_3^2$$

$X_1 = \text{RPM}$
 $X_2 = E_t \text{ (°F)}$
 $X_3 = C_t \text{ (°F)}$

Cooling Capacity (24V) - ASHRAE LBP BTU/hr (Watt)

RPM	Evaporator Temperature													
	-30°F (-34°C)	-20°F (-29°C)	-10°F (-23°C)	-5°F (-21°C)	0°F (-18°C)	5°F (-15°C)	10°F (-12°C)							
1800		83 (24)	139 (41)	162 (47)	185 (54)	210 (62)	241 (70)							
2400	21 (6)	111 (33)	176 (52)	205 (60)	235 (69)	269 (79)	308 (90)							
3000	42 (12)	135 (40)	207 (61)	241 (71)	277 (81)	318 (93)	365 (107)							
3600	64 (19)	157 (46)	234 (69)	272 (80)	314 (92)	360 (105)	414 (121)							
4200	87 (25)	180 (53)	259 (76)	300 (88)	345 (101)	397 (116)	457 (134)							

Power Consumption (24V) - ASHRAE LBP Watt **Current (24V) - ASHRAE LBP** Amp

RPM	Evaporator Temperature							Evaporator Temperature						
	-30°F	-20°F	-10°F	-5°F	0°F	5°F	10°F	-30°F	-20°F	-10°F	-5°F	0°F	5°F	10°F
1800		22.7	29.6	32.0	33.8	35.2	36.3		0.94	1.23	1.33	1.41	1.47	1.51
2400	17.4	27.5	35.3	38.5	41.5	44.2	46.9	0.73	1.15	1.47	1.61	1.73	1.84	1.95
3000	25.5	35.3	43.8	47.8	51.8	55.8	60.0	1.06	1.47	1.83	1.99	2.16	2.33	2.50
3600	34.2	43.5	52.6	57.3	62.3	67.5	73.2	1.42	1.81	2.19	2.39	2.59	2.81	3.05
4200	40.9	49.7	59.3	64.6	70.4	76.8	84.0	1.71	2.07	2.47	2.69	2.93	3.20	3.50

Efficiency (24V) - ASHRAE LBP BTU/hr/W (W/W)

RPM	Evaporator Temperature													
	-30°F (-34°C)	-20°F (-29°C)	-10°F (-23°C)	-5°F (-21°C)	0°F (-18°C)	5°F (-15°C)	10°F (-12°C)							
1800		3.67 (1.07)	4.70 (1.38)	5.06 (1.48)	5.47 (1.60)	5.97 (1.75)	6.63 (1.94)							
2400	1.23 (0.36)	4.04 (1.18)	4.99 (1.46)	5.33 (1.56)	5.67 (1.66)	6.08 (1.78)	6.57 (1.92)							
3000	1.66 (0.49)	3.83 (1.12)	4.73 (1.39)	5.05 (1.48)	5.36 (1.57)	5.70 (1.67)	6.08 (1.78)							
3600	1.86 (0.55)	3.62 (1.06)	4.45 (1.30)	4.75 (1.39)	5.04 (1.47)	5.33 (1.56)	5.66 (1.66)							
4200	2.13 (0.62)	3.61 (1.06)	4.38 (1.28)	4.65 (1.36)	4.90 (1.44)	5.16 (1.51)	5.44 (1.59)							

* all points are at 32.2°C (90°F) ambient, 32.2°C (90°F) suction temperature, 22.2°C (40°F) subcooling, 54.4°C (130°F) condenser

Performance Coefficients (24V) - ASHRAE LBP

Coefficient	Capacity (BTU/Hr)	Power (Watts)	Current (Amperes)	Mass Flow (Lbs/Hr)
C1	-2.358132E+03	-6.476596E+02	-2.698582E+01	-2.513047E+01
C2	1.520949E+00	-2.896618E-02	-1.206924E-03	1.566362E-02
C3	-3.003280E-05	1.654752E-05	6.894799E-07	-2.905075E-07
C4	1.502638E-09	-1.921756E-09	-8.007315E-11	1.729447E-11
C5	-9.092651E+01	7.587934E+00	3.161639E-01	-8.399066E-01
C6	4.220367E-02	1.292411E-01	5.385048E-03	1.695604E-03
C7	3.181015E-03	1.314242E-04	5.476008E-06	3.755620E-05
C8	3.284589E+01	1.799743E+01	7.498927E-01	3.395230E-01
C9	-8.038277E-02	-1.572455E-01	-6.551898E-03	-6.967798E-04
C10	-2.672858E-04	4.630518E-04	1.929382E-05	-3.479881E-06
C11	-8.886435E-04	2.143779E-05	8.932412E-07	-8.894770E-06
C12	2.830319E-09	-4.473376E-10	-1.863907E-11	3.437094E-11
C13	-2.341001E-06	2.007991E-07	8.366628E-09	-2.243456E-08
C14	3.052792E-06	-8.129419E-08	-3.387258E-09	3.038437E-08
C15	6.768640E-02	-9.306251E-04	-3.877605E-05	6.927089E-04
C16	-2.036331E-02	5.303071E-05	2.209613E-06	-2.109753E-04
C17	1.194597E+00	-1.261315E-01	-5.255481E-03	1.027170E-02
C18	-6.622377E-07	4.005049E-08	1.668770E-09	-8.411343E-09
C19	3.373231E-04	-1.736619E-05	-7.235914E-07	3.351148E-06
C20	6.132017E-08	7.686468E-09	3.202695E-10	2.134388E-10
C21	7.590068E-05	-7.873929E-07	-3.280804E-08	8.102220E-07
C22	-4.169238E-04	-1.185347E-03	-4.938947E-05	-1.433626E-05
C23	-3.870153E-03	4.924808E-04	2.052003E-05	-3.032197E-05

Performance Equation

$$Y = C_1 + C_2 x_1 + C_3 x_1^2 + C_4 x_1^3 + C_5 x_2 + C_6 x_2^2 + C_7 x_2^3 + C_8 x_3 + C_9 x_3^2 + C_{10} x_3^3 + C_{11} x_1 x_2 x_3 + C_{12} x_1^2 x_2 x_3 + C_{13} x_1 x_2^2 x_3 + C_{14} x_1 x_2 x_3^2 + C_{15} x_1^2 x_2 + C_{16} x_1 x_3 + C_{17} x_2 x_3 + C_{18} x_1^2 x_2 + C_{19} x_1 x_2^2 + C_{20} x_1^2 x_3 + C_{21} x_1 x_3^2 + C_{22} x_2^2 x_3 + C_{23} x_2 x_3^2$$

$x_1 = \text{RPM}$
 $x_2 = E_t \text{ (°F)}$
 $x_3 = C_t \text{ (°F)}$